

## P 产品介绍

Product Introduction

GPT210

316L

GPT210

( )

## P 产品特点

Product Features

- ◆
- ◆
- ◆

## A 产品应用

Application

- ◆
- ◆
- ◆
- ◆
- ◆

## S 技术参数

Specification



+




2088

+


项目	参数
	0~0.01...3.5MPa
	±0.5%FS, ±0.25%FS
	4~20mA, 0~5V, 1~5V, 0.5~4.5V, 0~10V, RS485
	5, 12~30VDC

	-10~70
	-20~120 ( )
	-40~125
	±1%FS/ ( ), ±1.5%FS/ ( )
	±1%FS/ ( ), ±1.5%FS/ ( )
	150%FS
	20g (20-5000HZ)
	100g (11ms)
	±0.2%FS/
	100M , 250VDC
	M20×1.5 G1/2 NPT1/2
	2088
	IP65


## D 外形尺寸 (mm) Dimensions (mm)

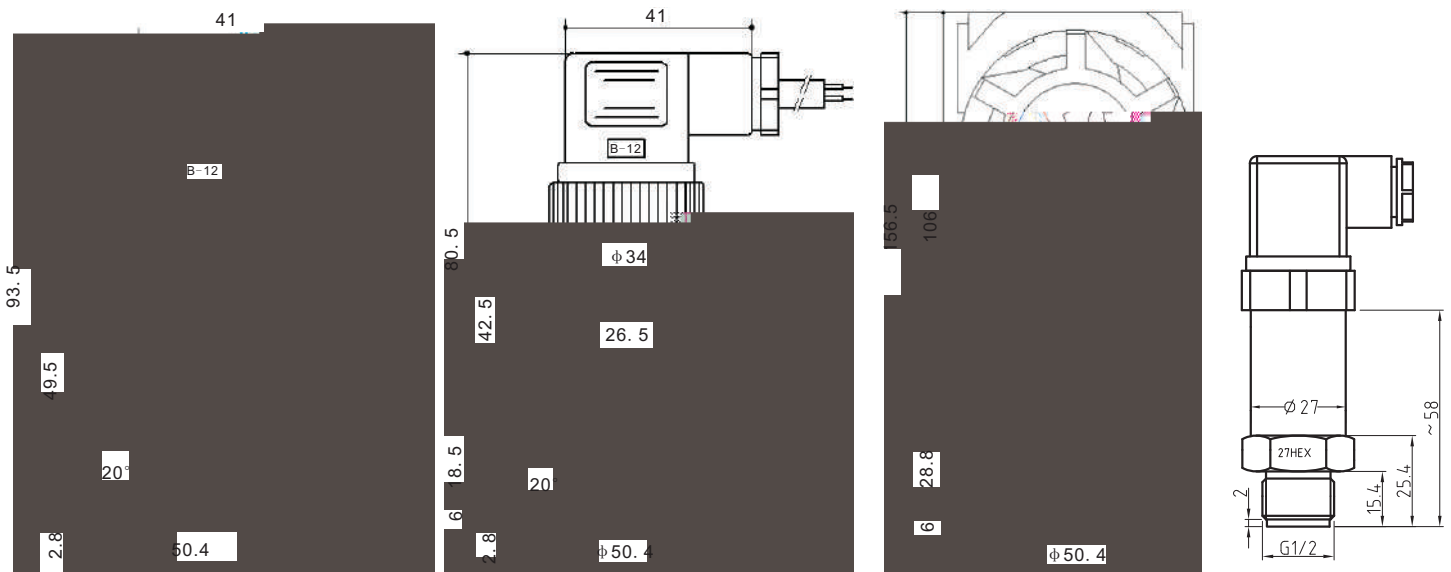

## 卡箍尺寸

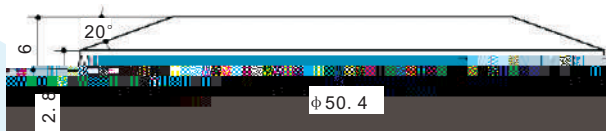

k1:2



k2:2.5

## T 产品选型 Type selection

GPT200A		GPT200B		GPT200C		2088		
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	
0/X								0~0.01kpa.....3.5Mpa
	G							( )
	S							
	A							
		T1						4~20mA
		T2						0~5VDC
		T3						1~5VDC
		T4						0~10VDC
			V1					12VDC
			V2					24VDC
			V3					12~30VDC
			V4					5VDC
				A1				0.25%FS
				A2				0.5%FS
					B1			
					B2			
					B3			2088
					B4			
						S1		304 SS
						S2		316L SS
							C1	M20x1.5(male)
							C2	G1/2(male)
							C3	