


## P 产品介绍

Product Introduction

GPT220

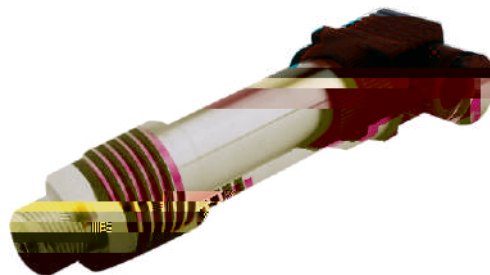

GPT220A

## P 产品特点


Product Features

- ◆ 316L
- ◆
- ◆
- ◆
- ◆
- ◆

## A 产品应用

Application

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

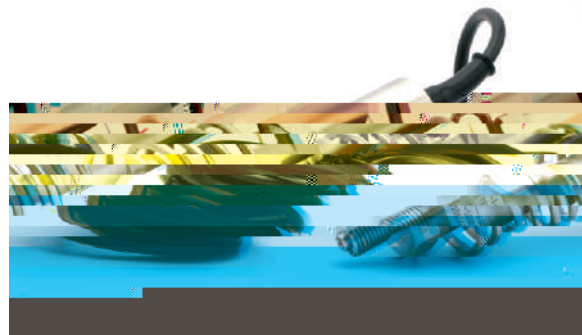


GPT220B

## S 技术参数

Specification

项目	参数
	-0.1...0~0.01...60MPa
	±0.5%FS( ), ±0.25%FS
	4~20mA, 0~5V, 1~5V, 0.5~4.5V, 0~10V
	5, 12~30VDC
	-10~70
	-20~85
	-20~120



## T 产品选型 Type selection

GPT220A/B	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	选型说明
	0/X								-0.1...0~0.01...60MPa
	G								( )
	S								
	A								
	T1								4~20mA
	T2								0~5VDC
	T3								1~5VDC
	T4								0~10VDC
	T5								0.5~4.5VDC
	V1								12VDC
	V2								24VDC
	V3								12~30VDC
	V4								5VDC
	A1								0.25%FS
	A2								0.5%FS
	B1								
	B2								
	S1								304 SS
	S2								316L SS
	C1								M20x1.5(male)
	C2								G1/4(male)
	C3								G1/2(male)
	C4								1/4NPT(male)
	CX								